


Skyrocket your productivity

With rapid print speeds and unmatched reliability, the ECOSYS MA3500cifx is an ideal option for medium to larger-sized work groups. A convenient touch panel provides simple and direct access to the multiple functions of this versatile MFP. In addition, Kyocera's open solution platform, HyPAS, can further optimise document workflow.



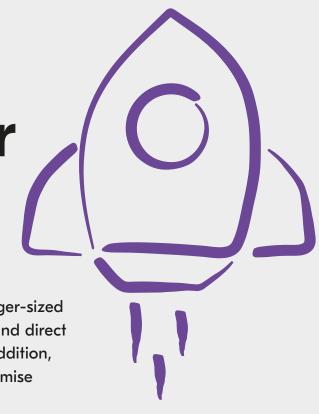

KYOCERA ECOSYS Laser Colour Multifunctional HyPAS™ solution platform

Operation panel: 177.8 mm (7 inch) full-colour touch panel display, speaker for job notification

Type: Desktop

Engine speed Simplex: Up to 35 pages A4 per minut e.

Engine speed Duplex: Up to 17.5 pages A4 per minute.

Duplex copy speed: Up to 17.5 pages A4 per minute.

Resolution: 1200 x 1200 dpi (print); 600 x 600 dpi (scan/copy)

Recommended Print Volume: 1,200 images per month.

Maximum Life: 600,000 images or 5 years

Scan Volume: max. 6,000 pages per month. Warm-up time: Approx. 26 seconds or less.

Time to first print: Approx. 5.7 seconds or less. Time to first copy: Approx. 6.6 or less (DP);

Approx. 6.1 or less (Platen).

CPU: ARM Cortex-A9 Dual core 1.2GHz

Memory: Standard 1.5GB; Max. 3GB (optional).

Standard interfaces: USB 2.0 (Hi-Speed), 2 x USB Host Interface. Gigabit Ethernet (10BASE-T/100BASE-TX/

1000BASE-T), optional Wireless LAN (IEEE 802.11b/g/n), 1 x eKUIO slot for optional devices other than FAX, Slot for optional SD Card

Integrated accounting: 100 department codes

Dimensions (W x D x H): Without packaging: $480 \times 577.5 \times 571.5$ mm (without protrusions);

 $480 \times 577.5 \times 575$ mm (including protrusions); With packaging: 623 x 728 x 789 mm

Weight: Without packaging: Approx. 39 kg (with bundled toner) Approx. 38 kg (without bundled toner)

With packaging: 51 kg

Power source: AC 220 ~ 240 V, 50/60 Hz

Power consumption: Printing: 449.1 W

Copying: 479.1 W Ready mode: 18.8 W Sleep-mode: 0.5 W

Noise (sound pressure level: ISO 7779/ISO 9296):

Operating: 51 dB (LpAm) Stand-by: 30 dB (LpAm)

Safety standards: TÜV/GS, CE

This unit is manufactured according to ISO 9001 quality standard and ISO 14001 environmental standard.

PAPER HANDLING

All paper capacities quoted are based on paper thickness of max. 0.11 mm. Please use paper recommended by KYOCERA unde normal environmental conditions.

Input capacity: Multi-purpose tray: 100 sheets (75 g/m² equivalent). $60-220~g/m^2$ A4, A5, A6, B5, B6, Letter, Legal, Folio, Custom (70 x 140 to 216 x 356 mm), Banner paper up to 1220 mm Standard universal paper cassette: 250 sheet with 75 g/m^2 . $60-220 \text{ g/m}^2$. A4, A5, A6, B5, B6, Letter, Legal, Folio, Custom (105 x 140 to 216 x 356 mm).

Max. input capacity with options: 2,000 sheets with 75 g/m². **Duplex:** Standard duplex unit, 60–163 g/m², A4, A5, B5, Letter, Legal, Custom (140x 210 mm - 216 x 356 mm).

Document Processor: Dual scan document processor as standard, 100 sheets, $50-120 \text{ g/m}^2$, A4, A5, A6, B5,

Letter, Legal, Custom (105 x 148 to 216 x 356 mm). Output capacity: 250 sheets (Equivalent to 80 g/m²) face down with paper full sensor.

PRINT FUNCTIONS

Controller language: PRESCRIBE Emulations: PCL6 (5c/XL), KPDL3 (PostScript 3 compatible), PDF, XPS, Open XPS, TIFF, JPEG, URF, PWG Raster, PCLm Operating systems: All current Windows operating

systems, MAC OS X Version 10.9 or higher, Chrome OS, Linux, as

well as other operating systems on request.
Fonts/barcodes: 93 outline fonts (PCL6, KPDL3), 4 fonts (Calibri), 4 fonts (Cambria), 1 Bitmap font, 45 types of one-dimen barcodes, 1 type of two-dimensional barcode (PDF417).

Print features: PDF Direct Print, Internet printing IPP 1.0, E-mail printing, WSD print, secure printing IPP over TLS, Local and network authentication, Network data encryption IPsec, HTTPS, LDAP over TLS, SNMPv3, SMTP over TLS, POP over TLS, Encrypted PDF Direct Print, TLS 1.3, Secure Boot, Run-time Integrity Check, Microsoft Universal Print, Printing for Chrome OS Mobile printing support: KYOCERA Mobile Print app for iOS and Android, AirPrint, Mopria, Microsoft Universal Print, Wi-Fi Direct (Opt).

COPY FUNCTIONS

Max. original size: A4/Legal.

Continuous copying: 1–999. Zoom range: 25–400% in 1% steps.

Preset magnification ratios: 5 Reductions / 5 Enlargements. Image adjustments: Text + Photo, Photo, Text, Chart/Map,

Features: Electronic sort (collate), ID card copy, 2in1, 4in1, auto cassette change, Skip blank page, Skip Line, DP Auto-cropping

Functionality: Scan-to-Email, Scan-to-FTP, Scan-to-SMB, Scan to USB Host, Network TWAIN, WIA, WSD scan, Chrome OS (Scan), AirPrint Monria

Scan speed Simplex: 60 ipm (300 dpi, A4, b/w);

40 ipm (300 dpi, A4 colour)

Scan speed Duplex: 100 ipm (300dpi, A4, b/w);

80 ipm (300 dpi, A4, colour)

Scan resolution: 300 dpi x 300 dpi, 200 dpi x 200 dpi (Default), 200 dpi x 100 dpi, 600 dpi x 600 dpi , 400 dpi x 400 dpi 200 dpi x 400 dpi, 1200dpi×1200dpi (TWAIN driver, WIAdriver).

256 greyscales per colour

Max. scan size: A4, Legal, Banner paper (max 915mm) **Original recognition:** Text, photo, text + photo, light text, optimised for OCR

File types: TIFF (MMR/JPEG compression), JPEG, XPS, Open XPS, PDF (MMR/JPEG compression), PDF/A-1, PDF/A-2, PDF (High compression), Encrypted PDF, MS Office file (Opt),

Features: Banner Scan, Colour scan, integrated address book, Active Directory support, encrypted data transfer, multi send (e-mail, fax, SMB/FTP folder, print) at once, Blank page skip, Border Erase, Digital Signature (Require SSD), DP Auto Crop

FAX FUNCTIONS

Compatibility: Super G3.

Modern speed: Max. 33.6 kbps.

Transmission speed: Max. 3 seconds (JBIG).

Scanning speed: 2.5 seconds or less.

Address book: Personal 200 entries, Group 50 entries

Scanning density:

Normal: 8 dot/mm x 3.85 line/mm (200 x 100 dpi) Fine: 8 dot/mm x 7.7 line/mm (200 x 200 dpi) Superfine: 8 dot/mm x 15.4 line/mm (200 x 400 dpi) Ultrafine: 16 dot/mm x 15.4 line/mm (400 x 400 dpi) Halftone: 256 grey scales

Original size: A4, Legal, A6, Banner (max 915mm)
Compression method: JBIG, MMR, MR, MH

Memory reception: 256 sheets or more

Features: Network fax, duplex transmission and reception, encrypted transmission and reception, polling transmission and reception, broadcast.

CONSUMABLES

Average continuous toner yield in accordance with ISO 19798 TK-5374K: Black 7,000 pages A4.

TK-5374Y, TK-5374M, TK-5374C: Yellow, Magenta and Cyan 5,000

Starter toner black 3,500 pages and Yellow, Magenta and Cyan 2,500 pages A4

OPTIONS

PF-5150 Paper feeder: Max. 550 sheet with 75 g/m², 600 sheet with

64 g/m², 60 - 220 g/m², A5R - Legal, 92.1 \times 165.1 (Com6), 114 \times 162 (Youkei2), Max 3 Units

1244/10 Cabinet: for 2-draw configuration Memory upgrade: 1GB/2GB

Storage Devices for easy document management:

HD-17 SSD hard disk: 64GB HD-18 SSD hard disk: 256GB

HD-19 SSD hard disk: 512GB

Scan Extension Kit (A): Scan to searchable PDF (embedded OCR) or to MS Office (docx, xlsx, pptx), HD or SD card is needed.

SECURITY OPTIONS

UG-33 AC: ThinPrint support

UG-35: TPM (Trusted Platform Module)

USB IC Card Reader + Card Authentication Kit (B):

Support for various authentication keys available

CRH 12: Card Reader Holder 12

Optional interface:

IB-37: Wireless LAN (802.11a/b/g/n/ac) with Wi-Fi Direct IB-50: Gigabit Ethernet 10BASE-T/100BASE-TX/

1000BASE-T

IB-51: Wireless LAN Interface (802.11b/g/n)

WARRANTY

2 years on-site as standard.

WHAT'S IN THE BOX:

Main unit, starter toner, waste toner box, Quick guide, Safety Guide, Operation panel sheet, power supply cord.

ECOSYS stands for ECOlogy, ECOnomy and SYStem printing. With their long-life components, ECOSYS devices are designed to maximise durability and minimise the total cost of ownership with regard to maintenance, administration and consumables. The cartridge-free system means that only the toner has to be replaced regularly. The modular design concept allows you to add workflowenhancing functions as required. Integrated system software provides long-term crossnetwork compatibility. KYOCERA's longlife components cost you and the environment less.











solutions

Phone: 08 9328 4600

Email: dds@multifaxdds.com.au Web: www.multifaxdds.com.au

